

Patching Tie Bolt Holes


Flupp 22ST & M P&P Mortar

Xypex Australia has available a new system for plugging and waterproofing tie bolt holes. This system is quick & simple to install.

Flupp 22ST

Internal water seal for spacer tubes
Non-ridged PVC is resistant to:


- Saline Solutions
- Diluted Alkaline Solutions
- Soap Suds
- Ammonia water
- Tested to 4.5 bars

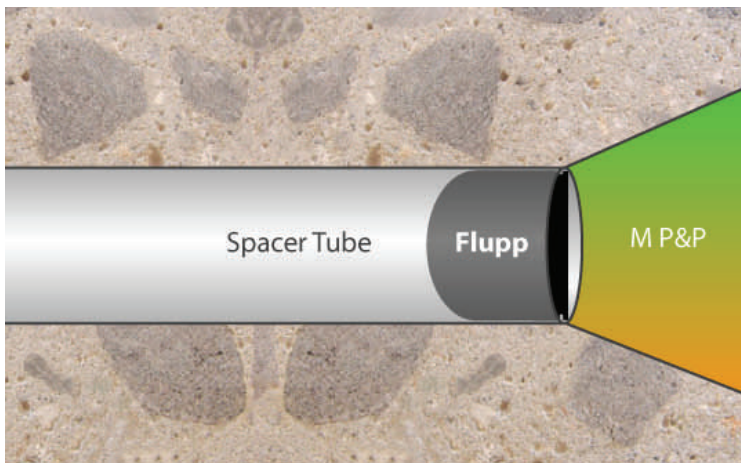

Application schematic illustrating use of Flupp 22ST and M P&P Mortar

M P&P Mortar

MP&P Mortar is a fast setting, non shrink mortar for concrete repairs where waterproofing is a requirement. It is ideally suited to sealing tie bolt holes.

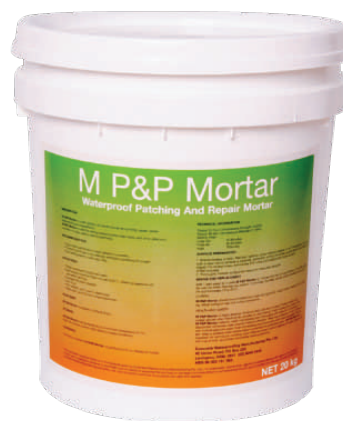

Flupp 22ST

The Flupp 22ST is conditionally resistant to:

- Detergents
- Sulphuric Acid – up to 40%
- Hydrochloric Acid – up to 35%
- Concentrated Caustic Soda Solution
- Concentrated Potash Lye
- Oil – mineral, vegetable and animal fats

When the Flupp is used in the recommended way, and M P&P mortar is used to seal the cone, materials such as those mentioned above do not come into direct contact with the Flupp.