


CONCRETE BLOCK WALL – ABOVE GRADE – EXTERIOR APPLICATION

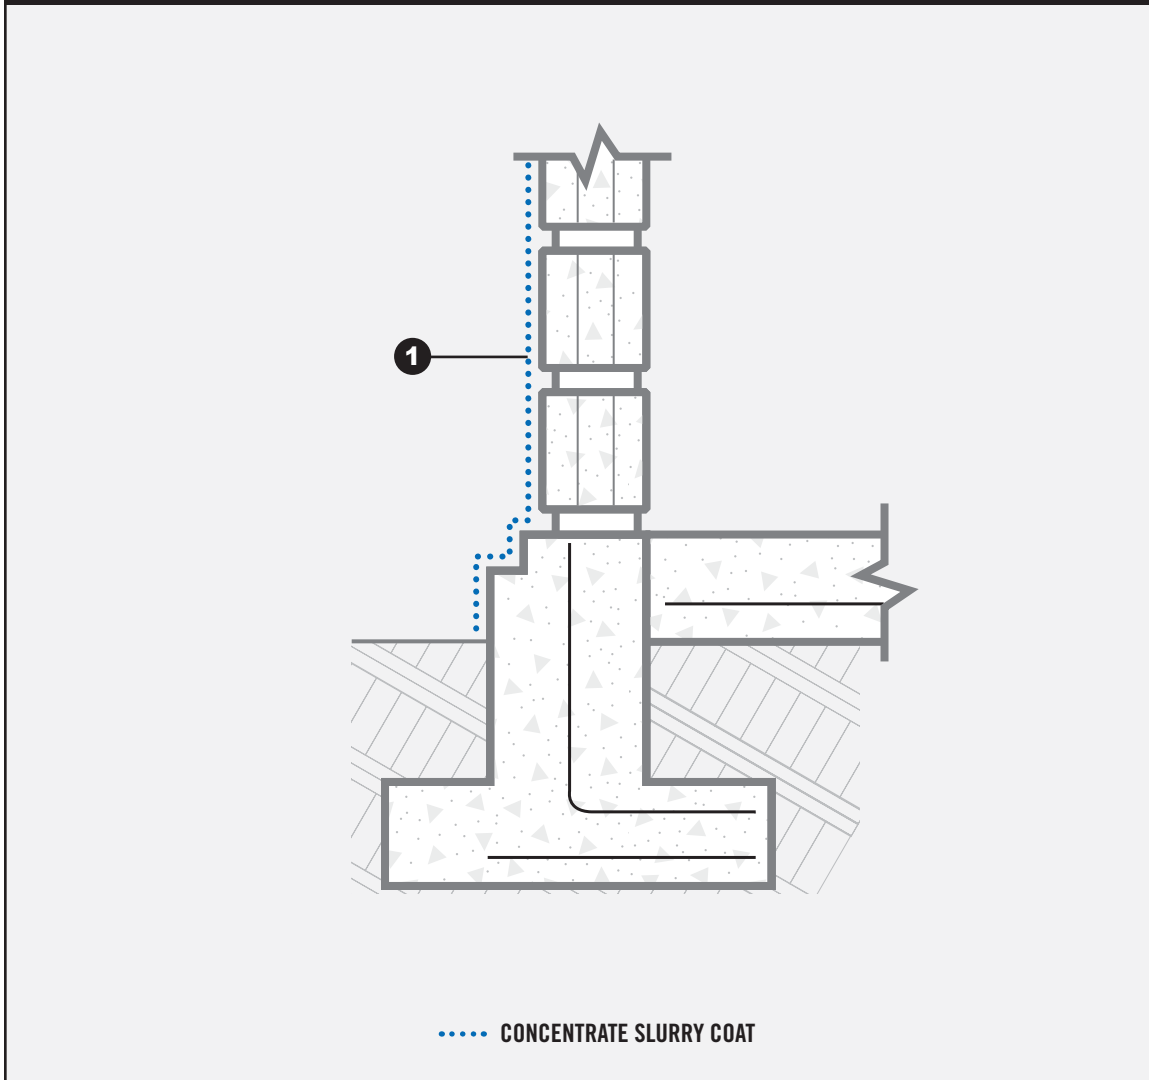

Step 1 Apply one slurry coat of Xypex Concentrate at the rate of 1.5 lb./sq. yd. (0.8 kg/m²). Coating should extend to ground level. Where poor quality block is encountered, a second coat of Xypex Concentrate should be applied at the rate of 1.25 - 1.5 lb./sq. yd. (0.65 - 0.8 kg/m²).

Wall sections should be defined before application and each of these sections should be completed during the same day to obtain maximum uniformity in appearance.

Because of the variances in the quality of concrete block (e.g. cement content, porosity, etc.), please consult your Xypex technical representative.

Note 1: Schematic diagram shows Xypex application details only and does not depict standard requirements for waterstops or expansion joint sealants.

Note 2: Schematic drawing shows Xypex Coating application. Specifier may consider the alternative use of Xypex Dry Shake (DS-Series), Xypex Additive (Admix C-Series) or Xypex Megamix I, where applicable. Refer to Standard Specifications for more information.