


UNDERGROUND VAULT / DRY WELL

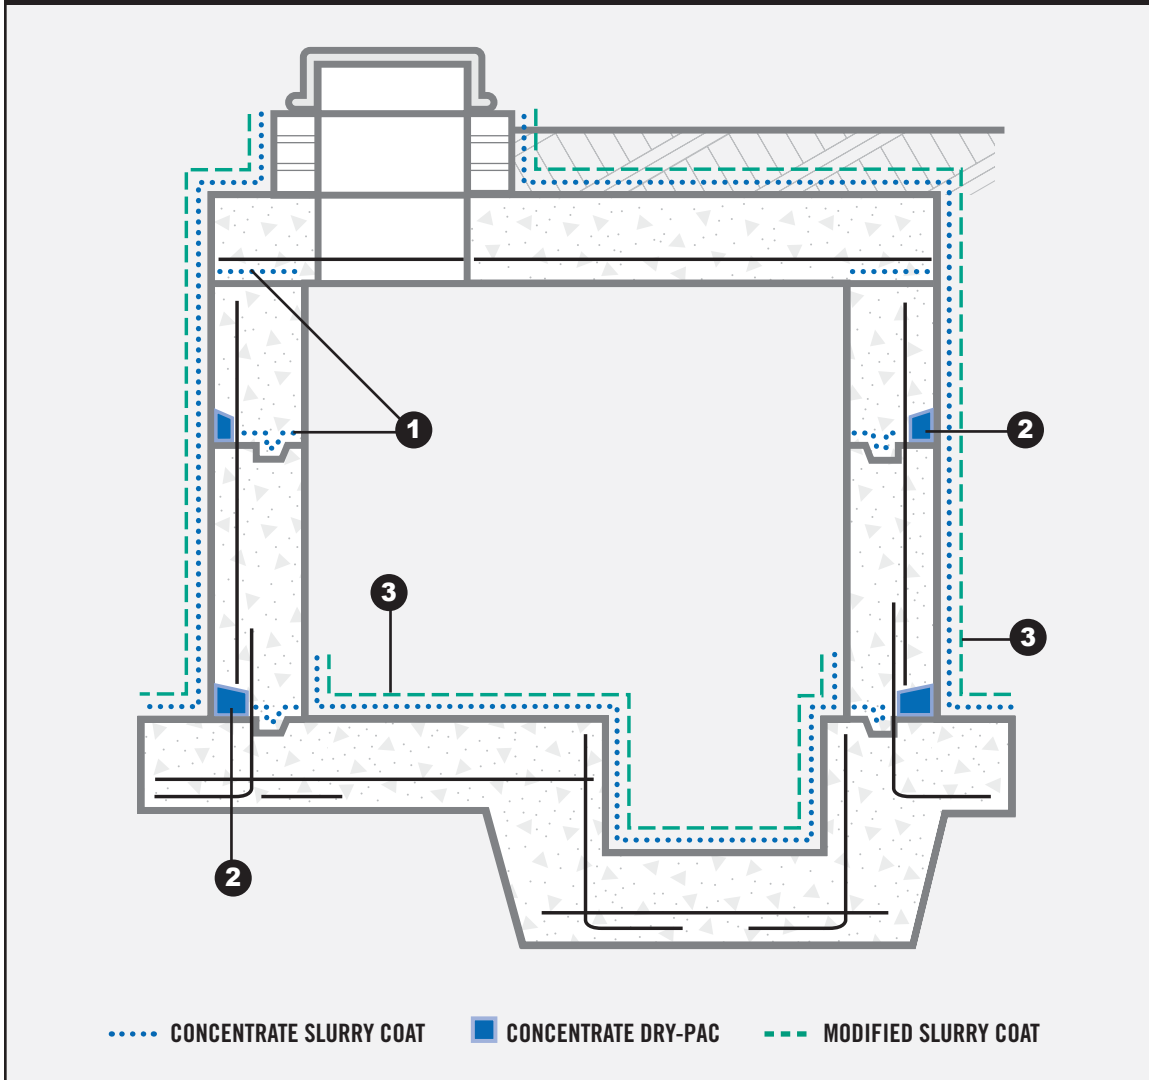

- Step 1** Between pours, apply Xypex Concentrate slurry to all joint surfaces at the rate of 2.0 lb./sq. yd. (1.0 kg/m²).
- Step 2** In sealing strip, apply one coat of Xypex Concentrate at the rate of 1.5 lb./sq. yd. (0.8 kg/m²), then fill slot to surface with Xypex Concentrate in Dry-Pac form.
- Step 3** To interior floor areas and exterior walls and roof, apply one slurry coat of Xypex Concentrate at the rate of 1.25 - 1.5 lb./sq. yd. (0.65 - 0.8 kg/m²). After the Concentrate has set, but while it is still "green", apply a coat of Xypex Modified at the rate of 1.25 - 1.5 lb./sq. yd. (0.65 - 0.8 kg/m²).

Note 1: Schematic diagram shows Xypex application details only and does not depict standard requirements for waterstops or expansion joint sealants.

Note 2: Schematic drawing shows Xypex Coating application. Specifier may consider the alternative use of Xypex Dry Shake (DS-Series) or Xypex Additive (Admix C-Series), where applicable. Refer to Standard Specifications for more information.