


STANDARD CONSTRUCTION JOINT / COLD JOINT DETAILS

Precast/Formed Wastewater/Recycled/Aggressive Water Pump Station

2018-11

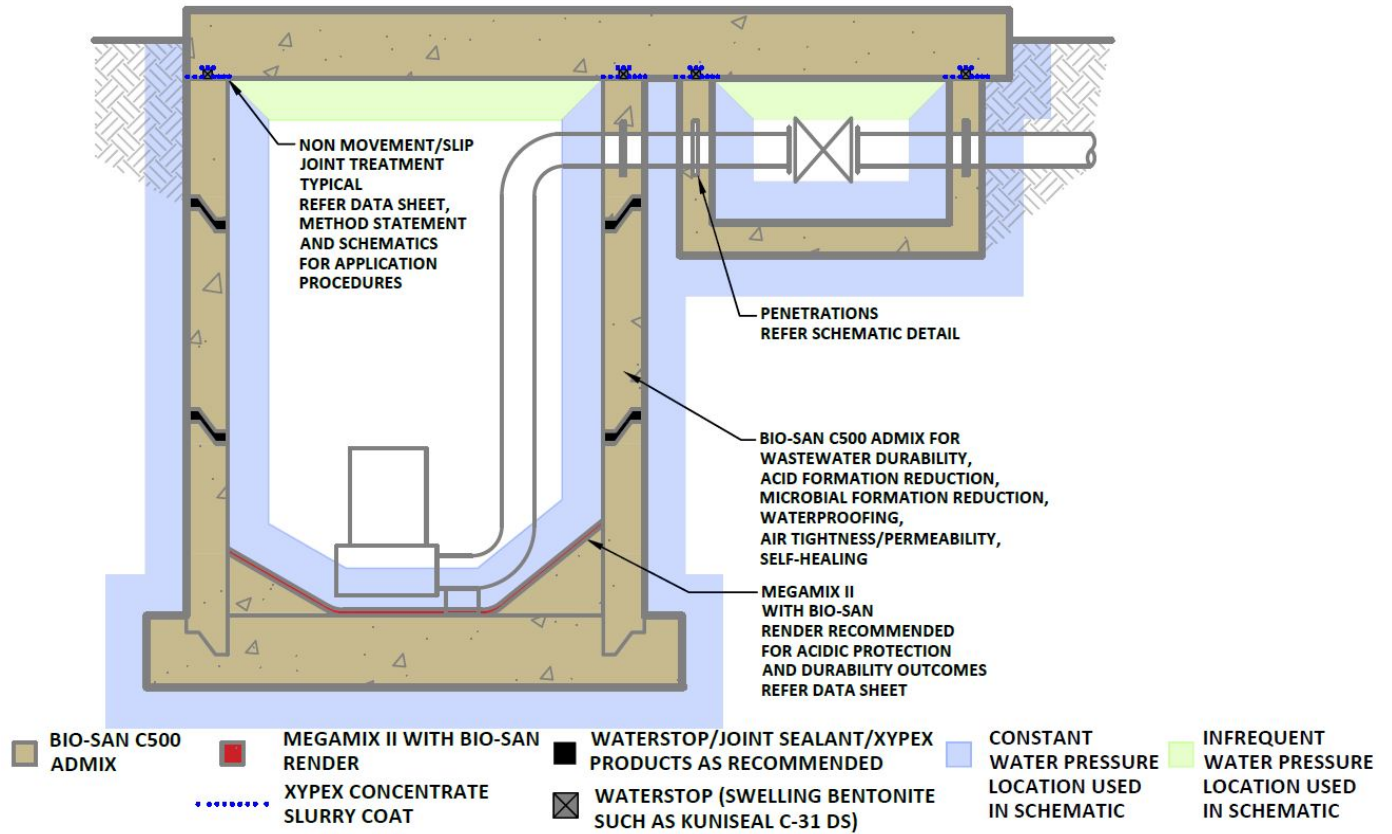

General

This detail must be used in conjunction with the Xypex and other product data sheets and method statements.

The use of Xypex products promote self-healing of static cracks up to 0.4mm width. Pending the design of the structure, designed allowable crack width, concrete selection, concrete placement, curing procedures and quality of workmanship undertaken. Cracking may occur or present post construction. The client/contractor or the like, should be aware that cracking may occur post construction which is due to the factors as indicated above. These factors are not in the control of Xypex. Post construction cracking should be monitored and repairs conducted, where required, in accordance with Xypex methodologies.